




User Guide



Earphone

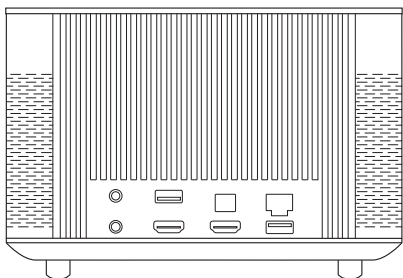

USB 2.0



SPDIF



LAN



Power




HDMI 1



HDMI 2/ARC



USB 3.0

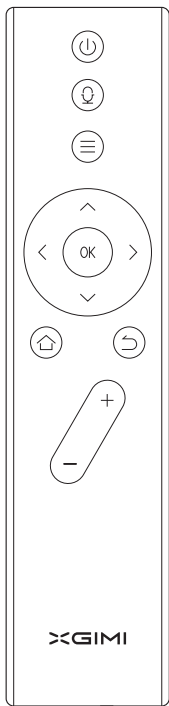

ON/OFF

Voice key
(unavailable for overseas market)

Menu/Shortcut

Direction Key


Home

Return

Volume+
(*Focal Length +)

Volume-
(*Focal Length -)

XGIMI

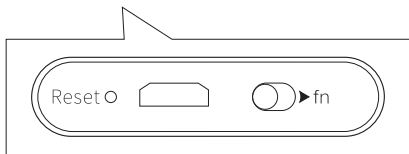



Reset

Charge Port


Function Key

1 Turn ON/OFF

- Power-on; after the indicator light is on, wait for the indicator light off;
- Slide the lens cap to turn on the device;
- Close the lens cap to turn off the device.

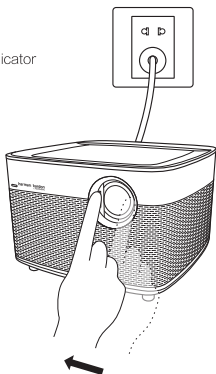



10CM




2 Remote Control Pairing

When being used for the first time, the remote control should be charged for half an hour at least:

- Keep the remote control close to the device at the distance between both within 10cm and press down "Home  " and "Return  " at the same time, at the moment, the green indicator light will flash for 3 seconds and then the blue indicator light will quickly flash, which means that the remote control enters the pairing mode (After the blue indicator light flashes, you can release the keys and the blue indicator light will continue to flash; when you hear a "ding" sound, it means the successful connection);
- If the pairing fails, it will exit the mode after the 30 seconds time-out; repeat the operation according to the steps above.


3 Focusing Function

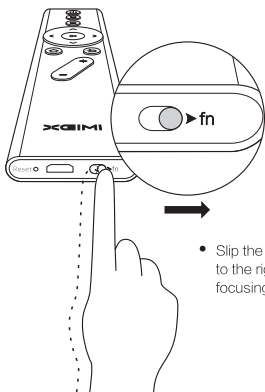

- Slip the Function Key(fn) to the right to enable the focusing function;


- Press “Volume+/-” key for adjusting the focus;

- When the picture is adjusted to be clear, turn the Function Switch at the bottom of the remote control to left to close the focusing function;

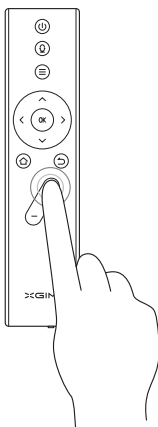

4 Charge Remote Control

When the red indicator appears and blinks, please charge the remote control.

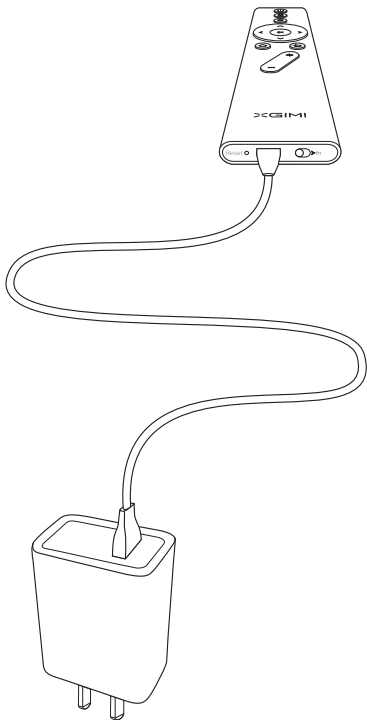

5


Function Description of Remote Control

- **Focusing Function**
Slide the Function Key (fn) at the bottom of the remote control to right to enable the focusing function; at the moment, "Volume+/-" key has the focusing function; slide the Function Key to left to close the focusing function; at the moment, "Volume+/-" key has the volume adjustment function; when the focusing function is enabled, the blue indicator light keeps on;
- **G-Sensor Function**
Slide the Function Key (fn) at the bottom of the remote control to right to enable the function of gravity sensor; horizontally use the remote control for the pairing operation of the G-Sensor game; slide the Function Key to left to close the G-Sensor function; when the function of G-Sensor is enabled, the air mouse is disabled and the blue indicator light keeps on;
- **Air Mouse Function**
Vigorously shake the remote control to turn on/off the air mouse function;
- **Menu Function**
Click "Menu key ≡" to enable the Menu function or press down and hold "Menu key ≡" to enable the shortcut function;
- **State of Charge**
Upon charging, the red indicator light keeps on; after the end of charging, the green indicator light keeps on; when there is a low battery prompt, the red indicator light flashes four times; when serious power shortage, after the red indicator light quickly flashes 10 times, the remote control shuts down and must be charged before use;
- **Standby and Sleep State**
In working mode, if the remote control is standby for 10 seconds, it will enter the sleep state; in this state, you can press any key to wake it up;
- **Reset Function**
When there is no response of the remote control, poke Reset key at the bottom of remote control, the red indicator light will flash three times, and then reset is done.

6

Adjustment Of Picture Size (Optical Zoom)

Insert the needle into the focusing hole on the edge of the lens and turn the lens clockwise/anticlockwise to adjust the picture size.

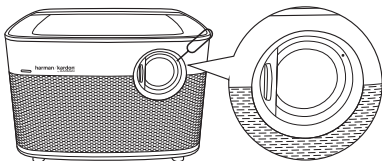

7

XGIMI Assistance

Scan the QR code to download XGIMI assistant

- mobile phone remote: device can be easily controlled by mobile phone.
- mobile phone resource: send the resource from mobile phone to device to view photos or videos.
- mirroring display control: mirroring to mobile phone, support gravity sensor games.



8 Sound Mode



Left/right sliding area Adjusting the volume



Add/Delete
favorite



Previous




Next



Pause/Play

Bluetooth Sound Mode



It can directly match the mobile phone for the first use. Press the Play key on the body to match other equipment again.



* The device can communicate with the mobile phone or other remote control devices only in Bluetooth sound mode.


Exiting Mode

When the lens cap is closed,





- Press “” key on the remote control to turn off the machine;


- Slide the lens cap to enter the projection mode;



When the lens cap is opened



- Press “⏻” key on the remote control to enter the projection mode;



- Close the lens cap to turn off the H1.

Product specification		
Optical parameters	Product classification	Home Projector
	Display technique	0.47" DMD RGB-LED
	Lens	High light transmission coated lens
	Specialty	3D
	Luminance	900ANSI lumens
	Luminance uniformity	98%
	Colorgamut	>=120%NTSC
	Contrast	10000:1
	Standard resolution	Full HD (1920X1080)
	Compatible resolution	2K/4K
Projection parameters	Projection ratio	1.39–1.5:1
	Keystone correction	Vertical: ± 35 degree, horizontal: ± 30 degree
	Projection method	Forward/backward/ hang ceiling
	Partial axis	100%
	Optical zoom	1.1 times
System parameters	CPU	Mstar 6A928 Cortex-A17 Quad-core 1.75GHz
	GPU	Mali-T760MP4
	RAM	3GB DDR3
	Storage	16GB eMMC
	System	Android5.1.1
	Mirroring display	Airplay/DLNA/Miracast
	Speaker Unit	45mm*2
	Sound power	7.5w*2
	Sound channel	2.0+Bass diaphragm
Ports	Input ports	HDMI2.0x2
		USB2.0x1
		USB3.0x1
	Output port	Headphone/SPDIFx1
		HDMI ARCx1
	Wired network port	LANx1
	WiFi	Dual-band 2.4/5GHz,802.11a/b/ g/n/ac 2x2 double antennas
Electrical parameters	Bluetooth	Bluetooth4.0/BLE
	Noise	<30dB
	Power dissipation	80-135W
	Power	AC100-240V,50/60Hz
Other parameters	Rated	17V≈7.06A
	Size	245 x245 x 216mm
	Weight	2.1kg
	The maximum operating temperature	40℃

Packing list	Power cable	x1
	Bluetooth remote-control	x1
	Remote-control charge cable	x1
	Zoom dial	x1
	Warranty card	x1
	Adapter	x1

Chengdu XGIMI Technology Co.,Ltd.

5F, Building A7, Tianfu Software Park,

Tianfu Avenue, Hi-tech Zone, Chengdu, China.

+86-28-61993596

www.xgimi.com

service@xgimi.com